

GENERAL BUILDING SPECIFICATIONS:

Notice - All Star Bleachers claims proprietary rights in the information disclosed on this drawing. It is issued in confidence for engineering information only and may not be used, in whole or in part, to manufacture anything whether or not shown hereon, reproduced or disclosed to anyone without direct written permission from All Star Bleachers

- A. GENERAL: Pre-assemble building fabricated from low maintenance, lightweight corrosive resistant aluminum (factory fabricated).
- 1 DIMENSIONS: 8' wide x 24' long and 93" nominal outside height. Interior dimension from floor to ceiling shall be 83" (2108.2 mm).
- 2 FRAME CONSTRUCTION: Provide structural framing of 6063-T6 aluminum alloy extrusions. Members shall have a GEORGETOWN BLUE PAINT. Connections shall be fastened internally to framing systems using mechanical fasteners or MIG welded where necessary.
- 3 BASE / FLOOR: Building to typically be constructed on a 4" galvanized mechanical tube frame. Floor assembly to be comprised of 3/16" aluminum tread plate finished floor.
- 4 LOWER WALL PANEL: Exterior shall be .032 GEORGETOWN BLUE aluminum, 3" (76.2 mm) insulation (R-11) and .032 interior aluminum. Overall thickness of panel shall be 3" (76.2 mm).
- 5 CEILING: Interior ceiling shall be foam core panel system providing smooth flat interior, constructed from 24 ga prefinished white steel with expanded polystyrene core.
- 6 ROOF: Construct using steel 20 ga, G-60 interlocking pan sections. Sections shall be 3" (76.2 mm) high with varying widths able to support minimum of 40 psf live load. Provide roof drains into full-perimeter gutter system.
- 7 WINDOWS: No fixed windows. Sliding windows shall have aluminum frame and 1/8" clear tempered safety glass and locks. Glass shall be glazed within wall system extrusions and not fastened to exterior wall.
- 8 DOORS: (1) Sliding door shall be extruded aluminum frame, top hung type using heavy duty ball bearing nylon tire with steel hub. A jimmy-proof single cylinder lock is provided.
- 9 ELECTRICAL: Electrical shall be wired according to N.E.C. Standards. Load center shall be a 125 Amp 120/240 volt unit with 8 or 16 open circuits. Wiring shall be #12 within surface mounted EMT conduit lines, and included shall be (3) GFCI duplex receptacles with tester and (3) standard duplex receptacles.
- 10 LIGHTING: Lighting shall be (3) twin fluorescent lights with tube covers.
- 11 HEAT: Heating shall be (3) wall mounted electric with fan forced operation, 1500w/5,120 BTU and thermostat in an enamel coated 20 ga steel cabinet.
- 12 A/C UNIT: (2) A/C unit to be high mount thru-wall 23,500/23,000 BTU (cooling), 230/208V unit.
- 13 CAMERA DECK: 7' x 11' camera deck with safety rail. Bolted connection done in field by others.

CERTIFICATION

CUSTOMER NAME

CUSTOMER ADDRESS

CITY, STATE ZIP



AUSTIN MOHAWK & CO.,
INC.

2175 BEECHGROVE PLACE
UTICA, NY 13501
PHONE: 315.793.3000
TOLL FREE: 1.800.765.3110
FAX: 315.793.9370

WEBSITE: www.austinmohawk.com
E-mail: info@austinmohawk.com

TITLE: 7'-9" X 24'-0"
VARSITY PRESSBOX- WITH CD

JOB NO:

LOCATION:

MOD NO: VPB824-CD

COLOR:

DATE:




DRAWN BY:

APPROVED BY:



SCALE: 1/4" = 1'

SHEET: 1 of 2


Notice - All Star Bleachers claims proprietary rights in the information disclosed on this drawing. It is issued in confidence for engineering information only and may not be used, in whole or in part, to manufacture anything whether or not shown hereon, reproduced or disclosed to anyone without direct written permission from All Star Bleachers

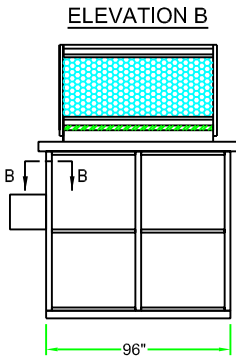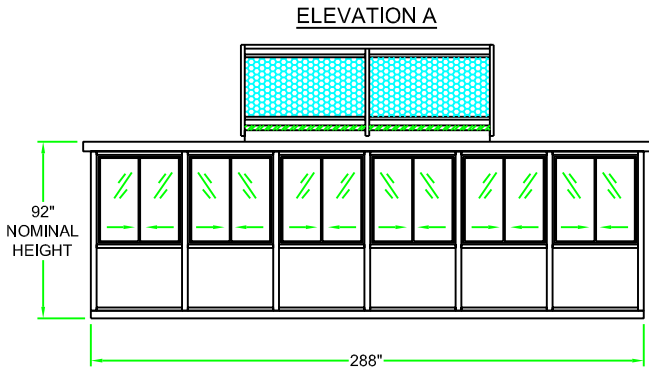


VIEW A-A

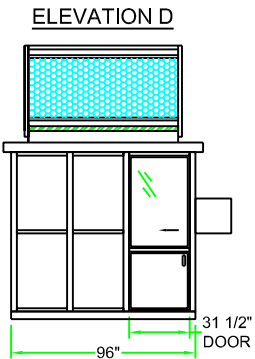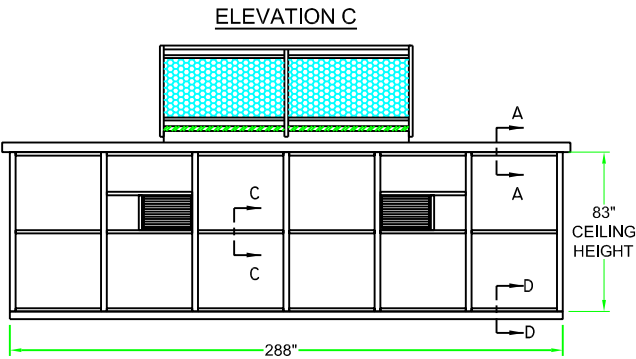


VIEW B-B



VIEW C-C

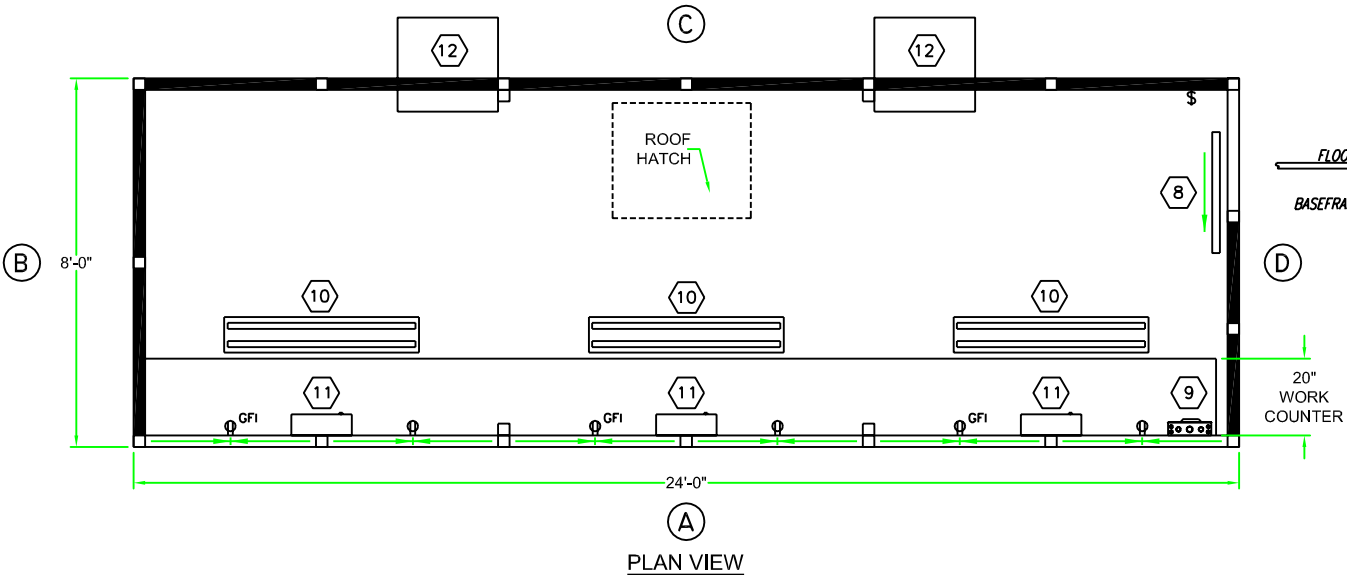

PLAN VIEW



VIEW D-D

CUSTOMER NAME

CUSTOMER ADDRESS

CITY, STATE ZIP



AUSTIN MOHAWK & CO., INC.

2175 BEECHGROVE PLACE
 UTICA, NY 13501
 PHONE: 315.793.3000
 TOLL FREE: 1.800.765.3110
 FAX: 315.793.9370

WEBSITE: www.austinmohawk.com
 E-mail: info@austinmohawk.com

| | |
|--------------|--|
| TITLE: | 7'-9" X 24'-0" VARSITY PRESSBOX - WITH CD |
| JOB NO: | |
| LOCATION: | |
| MOD NO: | VPB824-CD |
| COLOR: | |
| DATE: | |
| DRAWN BY: | |
| APPROVED BY: | |
| SCALE: | 1/4" = 1' |
| SHEET: | 2 of 2 |