

GENERAL BUILDING SPECIFICATIONS:

Notice - All Star Bleachers claims proprietary rights in the information disclosed on this drawing. It is issued in confidence for engineering information only and may not be used, in whole or in part, to manufacture anything whether or not shown hereon, reproduced or disclosed to anyone without direct written permission from All Star Bleachers

- A. GENERAL: Pre-assemble building fabricated from low maintenance, lightweight corrosive resistant aluminum (factory fabricated). Building exterior shall have no exposed fasteners.
- 1 DIMENSIONS: 8' wide x 18' long and 93" Nominal outside height. Interior dimension from floor to ceiling shall be 83" (2108.2 mm).
- 2 FRAME CONSTRUCTION: Provide structural framing of 6063-T6 aluminum alloy extrusions. Members shall have a AUSTIN WHITE finish. Connections shall be fastened internally to framing systems using mechanical fasteners or MIG welded where necessary.
- 3 BASE / FLOOR: Building to typically be constructed on a mechanical tube frame. Floor assembly to be comprised of 3/16" aluminum tread plate finished floor.
- 4 LOWER WALL PANEL: Exterior shall be .032 AUSTIN WHITE aluminum, 3" (76.2 mm) insulation (R-12) and .032 interior aluminum. Overall thickness of panel shall be 3" (76.2 mm).
- 5 CEILING: Interior ceiling shall be foam core panel system providing smooth flat interior, constructed from 24 ga, prefinished white steel with expanded polystyrene core.
- 6 ROOF: Constructed using galvanized 24 ga, G-60 interlocking pan sections. Sections are 3" (76.2 mm) high varying widths able to support minimum of 40 psf (1915 Pa) live load. Roof drains into full perimeter gutter system.
- 7 WINDOWS: No fixed windows. Sliding windows shall have aluminum frame and 1/8" (3.18 mm) CLEAR tempered safety glass, insect screen, and locking device. Glass shall be glazed within wall system extrusions and not fastened to exterior wall. Glass sealed with concealed gasket system.
- 8 DOOR: Sliding door shall be extruded aluminum frame, top hung style using an overhead track and heavy duty ball bearing nylon tires with steel hub. Door shall be supplied with mortise hook bolt lockset with removable cylinder.
- 9 ELECTRICAL: Electrical shall be wired according to N.E.C. Standards. Load center shall be a 125 amp. 120/240 volt unit with 8/16 open circuits. Wiring shall be within surface mounted EMT conduit, and included shall be a GFI duplex receptacle with tester.
- 10 LIGHTING: Lighting shall be a (2) dual bulb fluorescent light.
- 11 HEAT: Heating shall be (2) wall mounted electric with fan forced operation, 3000/4000 WATT, 10k BTU, 208/230 volt single phase and thermostat in an enamel coated 20 ga steel cabinet.

REVISION STATUS OF SHEETS		
-	-	REV
2	1	SH
CERTIFICATION		

CUSTOMER NAME

CUSTOMER ADDRESS

CITY, STATE ZIP



AUSTIN MOHAWK & CO., INC.

2175 BEECHGROVE PLACE
 UTICA, NY 13501
 PHONE: 315.793.3000
 TOLL FREE: 1.800.765.3110
 FAX: 315.793.9370


WEBSITE: www.austinmohawk.com
 E-mail: info@austinmohawk.com

TITLE: 7'-9" X 18'-0"
 VARSITY PRESSBOX


JOB NO:
 LOCATION:
 MOD NO: VPB818
 COLOR:
 DATE:
 DRAWN BY:
 APPROVED BY:
 SCALE: 1/4" = 1'
 SHEET: 1 of 2

Notice - All Star Bleachers claims proprietary rights in the information disclosed on this drawing. It is issued in confidence for engineering information only and may not be used, in whole or in part, to manufacture anything whether or not shown herein, reproduced or disclosed to anyone without direct written permission from All Star Bleachers


ELEVATION A

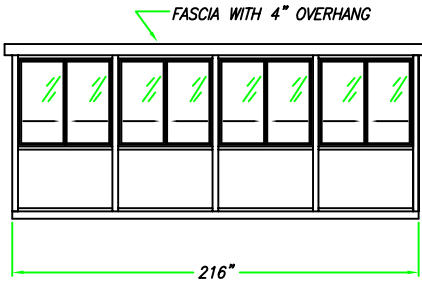



ELEVATION B




ELEVATION C

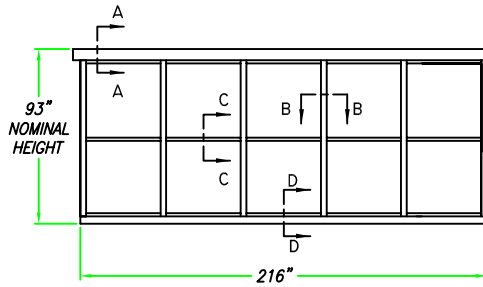


ELEVATION D




VIEW A-A




VIEW B-B



VIEW C-C



VIEW D-D

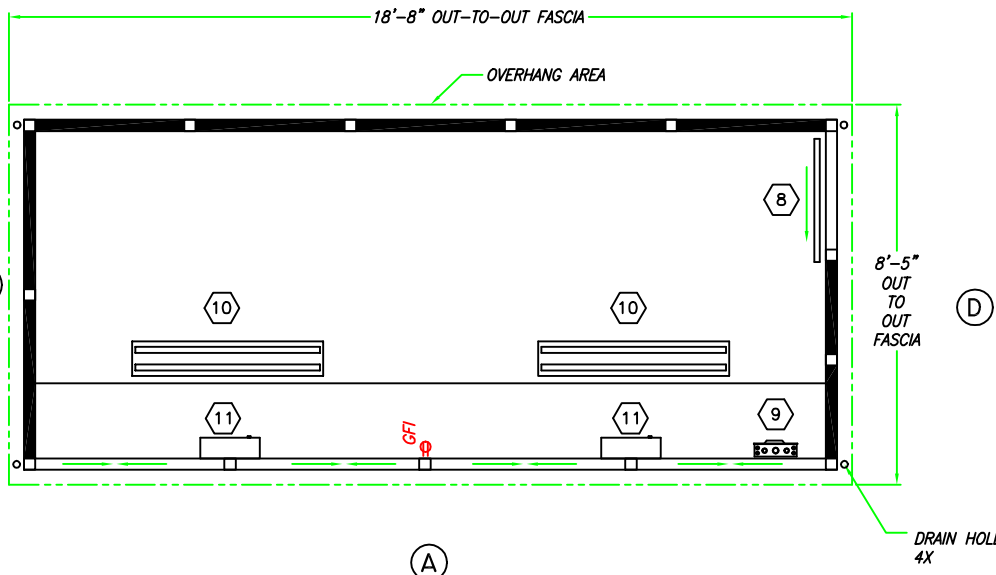

PLAN VIEW

1/2" = 1'

CUSTOMER NAME

CUSTOMER ADDRESS

CITY, STATE ZIP



AUSTIN MOHAWK & CO., INC.

2175 BEECHGROVE PLACE
 UTICA, NY 13501
 PHONE: 315.793.3000
 TOLL FREE: 1.800.765.3110
 FAX: 315.793.9370

WEBSITE: www.austinmohawk.com
 E-mail: info@austinmohawk.com

TITLE: 7'-9" X 18'-0"
 VARSITY PRESSBOX

JOB NO:

LOCATION:

MOD NO: VPB818

COLOR:

DATE:

DRAWN BY:

APPROVED BY:

SCALE: 1/4" = 1'

SHEET: 2 of 2

CERTIFICATION